



EnergyMetering

ENK-RP-N

Class C single-jet
wet dial meter

rollers protected

retrofitable with pulser




ZENNER
All that counts.

ENK-RP-N


Single-jet wet dial meter with protected rollers for cold water

Performance characteristics in overview


- Available with pulser 100 l/pulse
- Protected dial

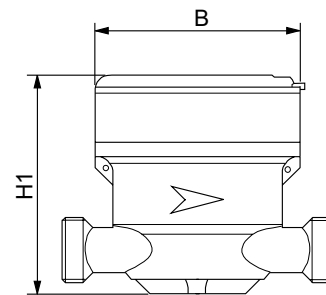

Technical data				
Nominal flow	Qn	m ³ /h	1.5	2.5
Nominal width	DN	mm	13/15	20
		inch	1/2"	3/4"
Length	L2	mm	110/115	115
			165/170	130
Maximum flow	Qmax	m ³ /h	3	5
Transitional flow	Qt	l/h	22.5	37.5
Minimum flow	Qmin	l/h	15	25
Starting flow		l/h	3.5	5
Display range	min	l	0.05	0.05
	max	m ³	99.999	99.999
Temperature	max	°C	30	30
Height	H1	mm	88	88
Width	B	mm	83	83

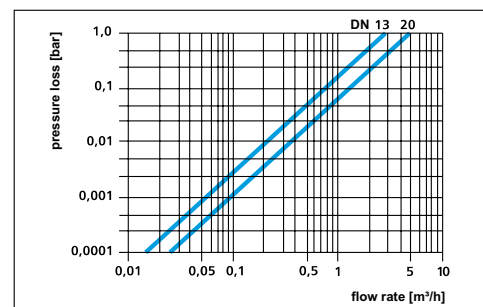

Head loss curves

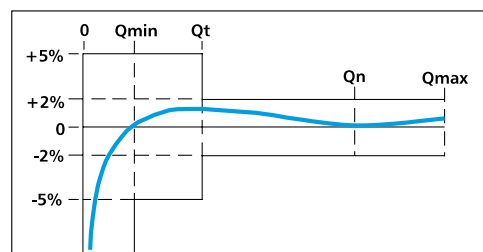

Typical accuracy curve

ZENNER International GmbH & Co. KG

Römerstadt 4
D-66121 Saarbrücken

Telephone +49 681 99 676-0
Fax +49 681 99 676-100

E-Mail info@zenner.com
Internet www.zenner.com